

WV100040

EN




Fire-resistant, scratch-resistant, and anti-fog polycarbonate full face protection. Requires KASK Easy Click Adapters FR. Can be worn with corrective glasses.

Compatible with KASK Zenith X (Zenith X MAX included), Primero and Quantum helmet series.

The ZEN FF PLUS VISOR mounted on the QUANTUM helmet, via the EASY CLICK ADAPTERS FR, makes the helmet usable for use in wildland firefighting (EN16471) and technical rescue activities (EN16473) where there is potential exposure to flames.

MOUNTING PARTS

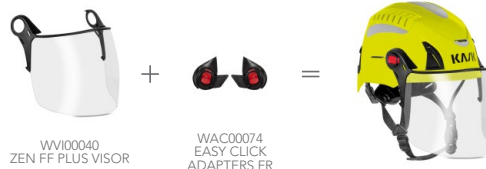

KIT AVAILABLE:
WKI00023
VISOR + ADAPTERS

TECHNICAL DETAILS



STANDARD

EN ISO 16321
EN 14458

CE 2754

ANSI Z87.1



CATEGORY

III



MATERIAL

Polycarbonate



ENHANCED OPTICAL PERFORMANCE

✓



WEIGHT

145 g



LENGTH

190 mm

TECHNOLOGIES



PANORAMIC LENS

Developed to maximize visibility with minimal viewing distortion.



ANTI-FOG

Equipped with an anti-fog treatment to increase wearer visibility in a variety of conditions.



ABRASION AND SCRATCH RESISTANCE

Lens treatment designed with protection from abrasion and scratches, increased durability and viewing clarity.



COMPATIBLE WITH GLASSES

Designed for use with corrective glasses.



DRIP PROOF UPPER CONTOUR

Rubber edge protects eyes from liquid and debris from entering the visor.



EASY CLICK VISOR ADAPTERS

Requires Easy Click Visor Adaptors to attach to helmet.

CE MARKINGS

CODE	COLOR	MARKING
WV100040-500	CLEAR	CE 2754 EN14458:2018 KASK ZEN FF PLUS MM/YY +R1 BT E1/E3 2C-1,2 -30°C +50°C UL1,2 ET 1 -5°C +55°C K N CH 9 16321 KASK ET 1-M -5°C +55°C 3 CH 9
WV100040-510	SMOKE	CE 2754 EN14458:2018 KASK ZEN FF PLUS MM/YY +R1 BT E1/E3 5-1,4 -30°C +50°C GL2 ET 1 -5°C +55°C K N CH 9 16321 KASK ET 1-M -5°C +55°C 3 CH 9
WV100040-520	SILVER MIRROR	CE 2754 EN14458:2018 KASK ZEN FF PLUS MM/YY +R1 BT E1/E3 5-2,5 -30°C +50°C GL2 ET 1 -5°C +55°C K N CH 9 16321 KASK ET 1-M -5°C +55°C 3 CH 9

ANSI MARKINGS

CODE	COLOR	MARKING
WV100040-500	CLEAR	ANSI Z87 + I U6 X D3
WV100040-510	SMOKE	ANSI Z87 + I U6 L1.5 X D3
WV100040-520	SILVER MIRROR	ANSI Z87 + I U6 L2 X D3

ADDITIONAL INFORMATION

GUARANTEE

3 years starting from the date of purchase.

LIFE SPAN

10 years starting from the date of manufacture. Life span depends on various factors that can cause deterioration such as sudden temperature changes, the amount of exposure to direct sunlight and the intensity of use. Altered vision and scratches are elements that signal the need to check for deterioration of the visor.

CLEANING

Clean only with water and mild soap. Allow to air dry. Do not use chemical detergents, solvents, petrol powders as they are too aggressive and could lower the structural resistance of the visor.

PRODUCT OF ITALY

3
YEARS
GUARANTEE

10
YEARS
LIFE SPAN



SCAN FOR
COMPLETE
COLLECTION